


Conventional Charge Part #	Max DC Volts	Max Start Amps Out	Max AC Amp Draw @ 480VAC	Approximate Ship Weight
CA24-510-34	24	83	4	113
CA24-680-34	24	111	5	113
CA24-765-34	24	125	5	116
CA24-935-34	24	152	6	116
CA24-1045-34	24	170	7	116
CA24-1190-34	24	194	8	119
CA24-1350-34	24	220	9	119
CA24-1500-34	24	245	10	142
CA36-510-34	36	83	5	113
CA36-765-34	36	125	8	113
CA36-935-34	36	152	9	116
CA36-1045-34	36	170	10	116
CA36-1190-34	36	194	12	116
CA36-1275-34	36	208	13	119
CA36-1350-34	36	220	14	119
CA36-1500-34	36	245	16	142
CA36-1625-34	36	265	17	146
CA48-510-34	48	83	7	113
CA48-680-34	48	111	9	113
CA48-800-34	48	130	11	116
CA48-935-34	48	152	12	116
CA48-1010-34	48	165	14	116
CA48-1190-34	48	194	16	150
CA48-1275-34	48	208	17	150
CA48-1360-34	48	222	18	150
CA48-1500-34	48	245	20	153
CA72-300-34	72	42	5	110
CA72-500-34	72	80	9	113
CA72-615-34	72	100	11	113
CA72-680-34	72	111	12	148
CA72-800-34	72	130	14	151
CA72-935-34	72	152	16	151
CA80-300-34	80	42	6	110
CA80-500-34	80	80	11	113
CA80-615-34	80	100	13	113
CA80-680-34	80	111	15	143
CA80-800-34	80	130	17	146
CA80-935-34	80	152	20	146

All standard SB connectors included in price, SB50, SB175, SB350
Euro style connectors, Schaltbau connectors are optional

- All prices are FOB, our facility, Troy OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.

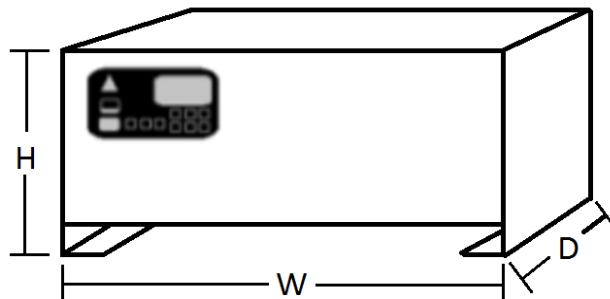

Case	H	W	D
4 (Shelf Mount)	14"	23"	24.5"

