


Opportunity Charge PN	Max DC Volts	Max Start Amps Out	Max AC Amp Draw @ 480VAC	Approximate Ship Weight
CA24-510-340C	24	128	5	116
CA24-680-340C	24	170	7	116
CA24-765-340C	24	191	8	122
CA24-880-340C	24	220	9	122
CA24-935-340C	24	234	10	141
CA24-1045-340C	24	260	11	144
CA24-1190-340C	24	298	12	148
CA24-1360-340C	24	340	14	148
CA24-1445-340C	24	361	15	148
CA24-1680-340C	24	420	17	161
CA36-510-340C	36	128	8	113
CA36-680-340C	36	170	10	116
CA36-765-340C	36	191	12	124
CA36-880-340C	36	220	13	124
CA36-935-340C	36	234	14	141
CA36-1045-340C	36	260	16	144
CA36-1190-340C	36	298	18	144
CA36-1360-340C	36	340	20	148
CA36-1445-340C	36	361	22	161
CA36-1680-340C	36	420	26	161
CA48-510-340C	48	128	11	116
CA48-595-340C	48	149	12	122
CA48-660-340C	48	165	13	122
CA48-765-340C	48	191	16	141
CA48-935-340C	48	234	18	141
CA48-1045-340C	48	260	21	144
CA48-1190-340C	48	298	23	148
CA48-1320-340C	48	330	26	148
CA72-400-340C	72	100	11	117
CA72-680-340C	72	160	19	122
CA72-800-340C	72	200	23	135
CA80-510-340C	80	128	17	140
CA80-680-340C	80	160	22	140
CA80-800-340C	80	200	26	135

All standard SB connectors included in price, SB50, SB175, SB350

Euro style connectors, Schaltbau connectors are optional

d indicates dual cables

- All prices are FOB, our facility, Troy OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.

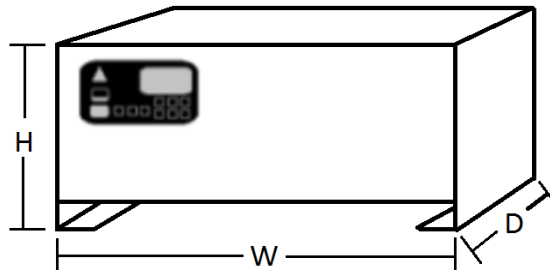

Enclosure	H	W	D
4	14"	23"	24.5"