


Catalogue Number	Max DC Volts	Max Start Amps Out	Max AC Amp Draw	Approximate Ship Weight
			208/240	
24-255-30-L	24	42	4/4	20
24-375-30-L	24	61	7/6	20
24-510-30-L	24	83	9/8	22
24-600-30-L	24	98	9/8	22
24-680-30-L	24	111	11/10	22
24-765-30-L	24	125	11/10	49
24-935-31-L	24	152	14/12	49
24-1045-31-L	24	170	14/14	49
24-1190-32-L	24	194	18/16	55
24-1350-32-L	24	220	20/18	55
36-255-30-L	36	42	7/6	20
36-375-30-L	36	61	9/8	20
36-510-30-L	36	83	11/10	22
36-650-30-L	36	105	13/12	22
36-765-31-L	36	125	17/15	49
36-935-31-L	36	152	20/18	49
36-1045-31-L	36	170	23/20	49
36-1190-32-L	36	194	28/24	57
36-1275-32-L	36	208	30/26	60
36-1350-32-L	36	220	32/28	60
36-1600-32-L	36	260	37/32	90
48-255-30-L	48	42	7/6	20
48-375-30-L	48	61	9/8	20
48-500-30-L	48	80	13/12	22
48-680-31-L	48	111	20/17	46
48-800-31-L	48	130	23/20	49
48-935-32-L	48	152	28/24	57
48-1045-32-L	48	170	32/28	57
48-1190-32-L	48	194	35/30	87
48-1360-32-L	48	222	40/34	87
48-1600-32-L	48	260	47/40	90
72-255-31-L	72	42	11/9	43
72-500-31-L	72	80	20/18	46
72-680-32-L	72	111	28/24	84
72-800-32-L	72	130	33/29	87
72-980-32-L	72	160	41/35	87
80-255-31-L	80	42	12/11	43
80-500-31-L	80	80	24/21	46
80-680-32-L	80	111	33/28	84
80-800-32-L	80	130	38/33	87
80-980-32-L	80	160	47/41	87

All standard SB connectors included in price, SB50, SB175, SB350

Euro (DIN) style connectors, Schaltbau Connectors are optional

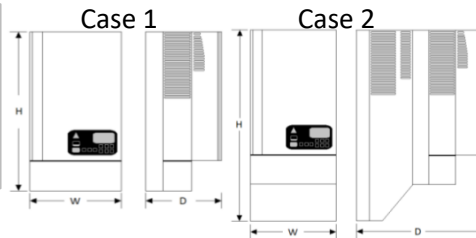

Case	H	W	D
Ø	13.5"	10.5"	5.5"
1	21"	10"	9"
2	25.75"	10"	19.25"