


Catalogue Number	Max DC Volts	Max Start Amps Out	Max AC Amp Draw	Approximate Ship Weight
			208/240	
24-255-300C-L	24	64	6/6	20
24-375-300C-L	24	94	9/8	22
24-510-300C-L	24	128	11/10	25
24-680-310C-L	24	170	16/14	49
24-765-320C-L	24	191	18/16	87
24-880-320C-L	24	220	23/20	87
24-935-320C-L	24	234	23/20	90
24-1045-320C-L	24	260	25/22	94
24-1190-320C-L	24	298	29/25	94
36-255-300C-L	36	64	9/8	20
36-420-300C-L	36	105	13/12	22
36-510-310C-L	36	128	17/15	46
36-680-310C-L	36	170	23/20	49
36-765-320C-L	36	191	28/24	86
36-935-320C-L	36	234	33/29	86
36-1045-320C-L	36	260	37/32	90
36-1190-320C-L	36	298	42/36	90
36-1360-320C-L	36	340	48/41	94
48-320-300C-L	48	80	13/12	22
48-510-310C-L	48	128	23/20	49
48-595-320C-L	48	149	28/24	86
48-680-320C-L	48	170	30/26	86
48-765-320C-L	48	191	37/32	87
48-935-320C-L	48	234	42/36	87
48-1045-320C-L	48	260	49/43	90
72-255-310C-L	72	64	16/14	41
72-320-310C-L	72	80	20/18	43
72-510-320C-L	72	128	32/28	86
72-635-320C-L	72	160	41/35	86
80-255-310C-L	80	64	19/16	43
80-320-310C-L	80	80	24/21	46
80-510-320C-L	80	128	38/33	86
80-635-320C-L	80	160	47/41	86

All standard SB connectors included in price, SB50, SB175, SB350

SBX, Euro (DIN) style connectors, Schaltbau connectors are optional

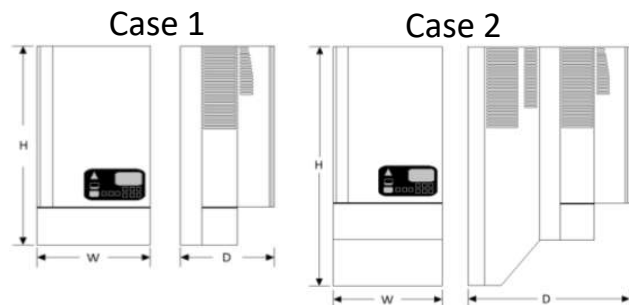

Case	H	W	D
0	13.5"	10.5"	5.5"
1	21"	10"	9"
2	25.75"	10"	19.25"