


Model	Case	Max DC Volts	Max Start Amps Out	Lead Acid Battery Range	Max AC Amp 1PH 208/240	Max AC Amp 3PH 208/240/480/600	Shipping Weight
24V/80A-1	B	24	80	480-599	14.7/12.8	N/A	133
24V/100A-1	B	24	100	600-719	18.4/16.0	N/A	137
24V/120A-1	B	24	120	720-839	22.2/19.2	N/A	148
24V/140A-1	B	24	140	840-959	25.9/22.4	N/A	161
24V/80A-3	B	24	80	480-599	N/A	8/7/3.5/2.8	152
24V/100A-3	B	24	100	600-719	N/A	10.1/8.8/4.3/3.5	161
24V/120A-3	B	24	120	720-839	N/A	12.1/10.5/5.3/4.2	170
24V/140A-3	B	24	140	840-959	N/A	14.1/12.2/6.1/4.8	181
24V/160A-3	B	24	160	960-1079	N/A	16.1/13.9/7/5.6	198
24V/180A-3	B	24	180	1080-1199	N/A	18.1/15.7/7.8/6.3	207
24V/200A-3	C	24	200	1200-1319	N/A	20.1/17.4/8.8/7	218
36V/80A-1	B	36	80	480-599	21.7/18.1	N/A	155
36V/100A-1	B	36	100	600-719	27.2/23.6	N/A	164
36V/120A-1	B	36	120	720-839	32.7/28.3	N/A	172
36V/140A-1	B	36	140	840-959	38.1/33.0	N/A	186
36V/160A-1	B	36	160	960-1079	43.6/37.8	N/A	199
36V/180A-1	C	36	180	1080-1199	48.9/42.4	N/A	212
36V/80A-3	B	36	80	480-599	N/A	11.9/10.3/5.2/4.1	170
36V/100A-3	B	36	100	600-719	N/A	14.8/12.9/6.4/5.2	176
36V/120A-3	B	36	120	720-839	N/A	17.8/15.5/7.7/6.2	190
36V/140A-3	B	36	140	840-959	N/A	20.7/18/9/7.2	209
36V/160A-3	B	36	160	960-1079	N/A	23.7/20.5/10.3/8.2	225
36V/180A-3	C	36	180	1080-1199	N/A	26.7/23.1/11.5/9.3	243
36V/200A-3	C	36	200	1200-1319	N/A	29.7/25.7/12.9/10.3	269
48V/100A-1	B	49	100	600-719	36/31.2	N/A	164
48V/100A-3	B	48	100	600-719	N/A	19.6/17/8.8/6.8	203
48V/120A-3	B	48	120	720-839	N/A	23.5/20.4/10.2/8.2	225
48V/140A-3	B	48	140	840-959	N/A	27.4/23.8/11.9/9.5	238
48V/160A-3	C	48	160	960-1079	N/A	31.3/27.2/13.6/10.8	284
48V/180V-3	C	48	180	1080-1199	N/A	35.2/30.5/15.2/12.3	295

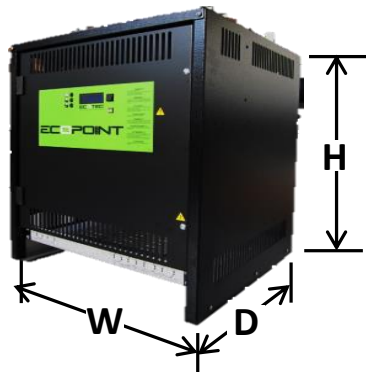

Cabinet Size: Case B 26.2" x 21.1" x 22.1" (HxWxD)
Case C 33.1" x 24.6" x 25.3"

- All prices are FOB, our facility, Troy OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.