


Conventional Charge Part #	Max DC Volts	Max Start Amps Out per Circuit	Max AC Amp Draw @ 480VAC -2/-4/-6	Approximate Ship Weight -2/-4/-6
CA24-510-34	24	83	8/16/24	149/300/450
CA24-680-34	24	111	10/20/30	149/300/450
CA24-765-34	24	125	10/20/30	155/312/468
CA24-935-34	24	152	12/24/36	155/312/468
CA24-1045-34	24	170	14/28/42	155/312/468
CA24-1190-34	24	194	16/32/48	167/336/505
CA24-1350-34	24	220	18/36/54	167/336/505
CA36-510-34	36	83	10/20/30	149/300/450
CA36-765-34	36	125	16/32/48	155/312/468
CA36-935-34	36	152	18/36/54	155/312/468
CA36-1045-34	36	170	20/40/60	155/312/468
CA36-1190-34	36	194	24/48/62	174/350/526
CA36-1275-34	36	208	26/52/78	174/350/526
CA36-1350-34	36	220	26/52/78	174/350/526
CA48-510-34	48	83	14/28/42	149/300/450
CA48-680-34	48	111	18/36/54	149/300/450
CA48-800-34	48	130	22/44/66	152/306/460
CA48-935-34	48	152	24/48/72	174/350/526
CA48-1010-34	48	165	28/56/84	174/350/526
CA72-300-34	72	42	10/20/30	143/288/434
CA72-500-34	72	80	18/36/54	149/300/450
CA72-615-34	72	100	22/44/66	150/302/454
CA80-300-34	80	42	12/24/36	143/288/434
CA80-500-34	80	80	22/44/66	149/300/450
CA80-615-34	80	100	26/52/78	150/302/454

All standard SB connectors included in price, SB50, SB175, SB350
Euro style connectors, Schaltbau connectors are optional

- All prices are FOB, our facility, Troy OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.

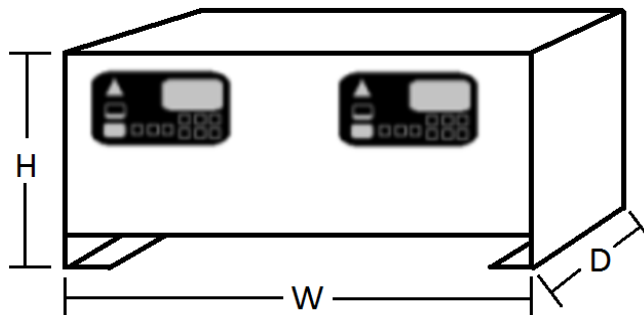

Case	H	W	D
4 (Shelf Mount)	14"	23"	24.5"