


Opportunity Charge Model	Max DC Volts	Max Start Amps Out	Max AC Amp Draw @ 480VAC	Approximate Ship Weight
24-255-300C	24	64	3	20
24-375-300C	24	94	4	22
24-510-300C	24	128	5	25
24-680-310C	24	170	7	49
24-765-330C	24	191	8	55
24-880-330C	24	220	9	55
24-935-330C	24	234	9	57
24-1045-330C	24	260	10	59
24-1200-330C	24	300	12	94
24-1445-320C	24	361	15	97
36-255-300C	36	64	4	20
36-420-300C	36	105	6	22
36-510-310C	36	128	8	46
36-680-310C	36	170	10	49
36-765-330C	36	191	12	57
36-880-330C	36	220	13	57
36-935-330C	36	234	14	57
36-1045-330C	36	260	16	59
36-1200-330C	36	300	18	59
36-1360-320C	36	340	20	94
36-1445-320C	36	360	22	97
36-1680-320C	36	420	26	97
48-320-300C	48	80	6	22
48-510-310C	48	128	11	49
48-595-330C	48	149	12	55
48-660-330C	48	165	13	55
48-765-330C	48	191	16	57
48-880-330C	48	220	17	57
48-935-320C	48	234	18	87
48-1045-320C	48	260	21	90
48-1190-320C	48	298	24	90
48-1275-320C	48	319	25	90
48-1320-320C	48	330	26	90
72-255-330C	72	64	7	43
72-320-330C	72	80	9	46
72-400-330C	72	100	11	50
72-680-320C	72	170	19	55
72-800-320C	72	200	22	57
80-255-330C	80	64	9	43
80-320-330C	80	80	11	46
80-400-330C	80	100	13	55
80-510-330C	80	130	17	86
80-680-320C	80	170	22	86
80-800-320C	80	200	26	90

All standard SB connectors included in price, SB50, SB175, SB350

Euro style connectors, Schaltbau connectors are optional

- All prices are FOB, our facility, Troy OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.

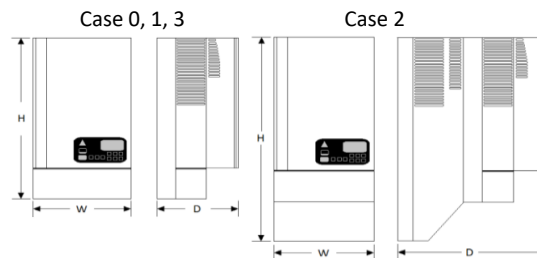

Enclosure	H	W	D
0 (5kW)	13.5"	10.5"	5.5"
1 (8kW)	21"	10"	9"
2 (16kW)	25.75"	10"	19.25"
3 (10kW)	22.5"	10.5"	9.75"